



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed


*Andrew Gorse*

Dated

26 September 2003

# Patents Form 1/77

Pat. Act 1977  
(Rule 16)

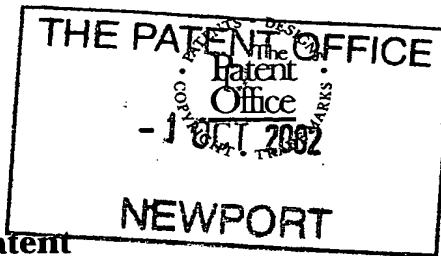

01 OCT 02 8 52 159-1 D02B  
P01/7700 00-0222673

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

A10616GB - DJL/ACL/lh

2. Patent application number

(The Patent Office will fill in this part)

0222673.6

01 OCT 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

J.C. Bamford Excavators Limited  
Rocester, Uttoxeter  
Staffordshire  
ST14 5JP

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

763852001

4. Title of the invention Excavating and Loading Machine

5. Name of your agent (if you have one)

Forrester Ketley & Co.

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Chamberlain House  
Paradise Place  
Birmingham  
B3 3HP

Patents ADP number (if you know it)

133005

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

Yes

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	-
Description	7
Claim(s)	3
Abstract	1
Drawing(s)	3

22

g

10. If you are also filing any of the following, state how many against each item.

Priority documents	-
Translations of priority documents	-
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	-
Request for preliminary examination and search (Patents Form 9/77)	One
Request for substantive examination (Patents Form 10/77)	-
Any other documents (please specify)	-

11. I/We request the grant of a patent on the basis of this application.

Signature  
Forrester Ketley & Co.

Date  
30 September 2002

12. Name and daytime telephone number of person to contact in the United Kingdom
- David Lucking  
0121 236 0484

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

PATENTS ACT 1977

A10616GB/DJL

Title: Excavating and Loading Machine

Description of Invention

This invention relates to a wheeled excavating and loading machine.

Excavating and loading machines are known which have a body with a loading arm at a front end of the body and an excavating arm at a rear end of the body, and a wheeled ground engaging structure, such as a pair of axles carrying ground engaging wheels.

Such machines are typically steerable by the wheels on one or both of the axles being steerable.

A combined excavating and loading machine provides for an owner, a versatile machine which is capable of performing a variety of excavating and loading operations. However, in providing a machine which is capable of performing both excavating and loading operations, design compromises have been made with the result that when the machine is performing particularly loading operations, machines have tended not to be as capable as modern dedicated loading machines, for one example of the kind in which a loading arm is mounted generally centrally of the machine between the sides of the machine with an operator's cab mounted towards one side of the machine, and a machine engine being mounted towards an opposite side of the machine, so that the loading arm can be lowered into a space between the cab and body structure beneath which the engine is at least partly provided.

According to the invention we provide an excavating and loading machine having a body with a front end and a rear end, the body being carried on a steerable wheeled ground engaging structure, the machine including an excavating arm mounted at the rear end of the body, and a loading arm which is mounted on the body and extends forwardly of the body, and wherein an

operator's cab is provided which is mounted towards the rear end of the body, generally centrally of the body between sides of the machine, and a machine engine is mounted beneath a bonnet structure towards the front end of the body generally centrally of the body between sides of the machine, and the loading arm is mounted towards one side of the machine and at least over a range of operating positions extends alongside the cab and bonnet structure.

Thus whereas in a conventional combined excavating and loading machine the loading arm is mounted for up and down movement about a generally horizontal axis which is towards a front of the cab, in the machine of the invention, because the loading arm extends alongside the cab, the loading arm may be mounted further rearwardly than with such machines, thus affording an operator many of the advantages of dedicated loader machines, such as improved sight lines over a larger range of loading arm movements, greater reach as the loading arm can be longer than can be provided on a conventional excavating and loading machine, and the machine can be better balanced during loading operations, particularly when handling loads at height.

Preferably the loading arm is mounted for up and down movement by one or more actuators, about a generally horizontal axis which is positioned towards a rear of the operator's cab, preferably directly above an axis about which rear wheels of the ground engaging structure rotate. Preferably the generally horizontal loading arm mounting axis is located above the rear wheels below, or at, or at least not substantially above, a plane containing an uppermost part of the bonnet structure.

The loading arm may include a plurality of relatively telescopic sections so that the arm may be capable of substantially longer reach than a loading arm provided on a conventional combined excavating and loading machine, and the arm may include a load handling tool support at an outermost end of the loading arm furthest from the body, which support may extend laterally with respect to the extent of the arm, in front of the bonnet structure. The load

handling tool may typically be a loading bucket or other suitable loading tool which may be removable from the support to enable an alternative tool to be used.

Thus the loading tool may be generally central in front of the central bonnet structure for ease of operator use.

The excavating arm may be mounted at the rear end of the body on a carriage which permits the arm to be moved laterally across the rear of the body into an appropriate position for performing excavating operations, and the excavating arm may be mounted on a mounting which permits the arm to rotate about a generally upright axis and about a generally horizontal axis during excavating operations.

It will be appreciated that notwithstanding the loading arm is preferably mounted towards the rear end of the body, the excavating and loading arms may be used independently, although not usually simultaneously, without any possibility of fouling.

The loading arm may be operated by first controls located at a first operating position in the operator's cab, and from which position the operator may drive the machine over the ground on the wheels, whilst the excavating arm may be controlled by second controls at a second operating position in the operator's cab, an operator's seat being moveable, e.g. rotatable to enable the operator to access and use either the first or second controls, depending upon the seat position.

Embodiments of the invention will now be described with reference to the accompanying drawings in which:-

FIGURE 1 is an illustrative perspective view from the front and one side of a machine in accordance with the invention;

FIGURE 2 is an illustrative view from the front of the machine of figure 1;

FIGURE 3 is an illustrative perspective view of part of the machine of figures 1 and 2 from the rear and one side.

Referring to the drawings there is shown a combined excavating and loading machine 10 which includes a body 11 on which there is provided an operator's cab 12. The cab 12 is positioned rearwardly of the body 11, generally centrally between sides of the machine 10, but slightly offset.

The body 11 is carried on a wheeled ground engaging structure 15 which in this example is provided by a front axle 16 which carries a pair of front wheels 18, and rear axle (not seen) which carries a pair of rear wheels 20. The rear wheels 20 are rotatable about an axis A of rotation, which axis will be further referred to below.

In front of the operator's cab 12, and extending to the front end of the body 11, there is a bonnet structure 22 beneath which there is provided a machine engine 23. The engine 23 is thus mounted generally centrally between the sides of the machine 10.

At the rear end of the body, there is provided an excavating arm 25 which includes a first section 26 which is mounted on the body 11 via a mounting 28, and a second part 27 which is pivotal about a generally horizontal axis B relative to the first part 26, by one or more actuators 28a. At the lowermost end of the second excavating arm part 27, an excavating tool, such as an excavating bucket 30 is provided which too, is operated by one or more actuators (not shown).

The mounting 28 enables the excavating arm 25 to rotate about a generally upright axis C as well as about a generally horizontal axis D relative to the body 11 during excavating operations.

The mounting 28 is provided on a carriage 29 which is movable along a rail 32 provided at the rear of the body 11, either manually and/or by power means, to enable the excavating arm 25 to be moved to a position suitable for performing particular excavating operations.

The machine 10 further includes a loading arm 35 which in this example includes two relatively telescopic sections 36, 37. The arm 35, at least over a range of operating positions, extends alongside the cab 12 and the bonnet structure 22.

A first of the sections, section 36 is pivotally mounted on the body 11 for up and down movement of the arm 35 by one or more actuators 34, about a generally horizontal axis F, which axis F is located rearwardly of the body 11, adjacent a rear of the cab 22, and above the rear wheels 20. Preferably the mounting axis F is directly above the axis of rotation A of the rear wheels 20 but is below, or at, or at least not substantially above the level of an uppermost part 38 of the bonnet structure 22.

The loading arm 35 may thus, at least over a range of movements be raised and lowered alongside the cab 12 and bonnet structure 22 affording excellent visibility to an operator in the cab 12. Moreover, at an end of the loading arm 35 furthest from the body 11, there is provided a support structure 40 for a loading tool such as a bucket or loading forks or the like, the support structure 40 extending laterally of the remainder of the loading arm 22 in front of the bonnet structure 22, so that the loading tool may be located in use, directly centrally in front of the bonnet structure 22, so as to be centred on a centre line of the machine 10.

The described mounting of the loading arm 35 provides the machine 10 with great stability even when handling heavy loads at height when the arm 35 may not be alongside the bonnet structure 22, and by providing the cab 12 towards a rear of the machine 10, an operator may enjoy excellent visibility when performing loading operations.

Within the cab 12 there is provided an operator's seat 42 which is moveable, e.g. rotatable about a generally upright axis, to enable an operator to access first controls at a first operating position in the cab 12, when the seat 42 is facing forwardly (as shown in figure 2), to control the loading arm 35 and to



drive the machine 10 over the ground, and alternatively to access and use second controls at a second operating position in the cab 12 with the seat 42 facing rearwardly, to control the excavating arm 25 during excavating operations, as seen in figure 3.

Further features of the machine 10 are as follows.

Desirably at least the front wheels 18 are steerable on their axle 15 although the rear wheels 20 may be steerable instead of or in addition to the front wheels 18.

The cab 12 configuration may be different to that shown, although the configuration shown does provide a compact cab 12 with good all round visibility in which an operator may comfortably work controlling the machine in both excavating and loading operations.

The bonnet structure 22 need not be of the exact configuration shown, although providing a bonnet structure 22 which dips down towards the front end of the machine 10 enables an operator when working the loading arm 35, to have sight line to the loading tool even when the loading arm 35 is in its lowest position, whilst the operator is sufficiently high in the cab 12 alternatively to have a good sight line to the outermost end of the excavating arm 25 during excavating operations.

The width of the machine 10 between the sides of the machine 10 can be designed to be within acceptable limits as there is no engine or engine covering structure e.g. bonnet at the opposite side of the loading arm 35 to the cab 12 as there is with some dedicated loading machines, and the loading arm 35 may be mounted at a relatively low position as the engine is not located beneath the arm 35 as is the case with other dedicated loading machines. Other dedicated loading machines have a rearwardly mounted engine, which although this affords great design flexibility in the location of the loading arm, such position is unavailable with the combined excavating and loading machine of the invention, due to the presence of the excavating arm 25.

The features disclosed in the foregoing description, or the following claims, or the accompanying drawings, expressed in their specific forms or in terms of a means for performing the disclosed function, or a method or process for attaining the disclosed result, as appropriate, may, separately, or in any combination of such features, be utilised for realising the invention in diverse forms thereof.

CLAIMS

1. An excavating and loading machine having a body with a front end and a rear end, the body being carried on a steerable wheeled ground engaging structure, the machine including an excavating arm mounted at the rear end of the body, and a loading arm which is mounted on the body and extends forwardly of the body, and wherein an operator's cab is provided which is mounted towards the rear end of the body, generally centrally of the body between sides of the machine, and a machine engine is mounted beneath a bonnet structure towards the front end of the body generally centrally of the body between sides of the machine, and the loading arm is mounted towards one side of the machine and at least over a range of operating positions extends alongside the cab and bonnet structure.
2. A machine according to claim 1 wherein the loading arm is mounted for up and down movement by one or more actuators, about a generally horizontal axis which is positioned towards a rear of the operator's cab.
3. A machine according to claim 2 wherein the loading arm is mounted directly above an axis about which rear wheels of the ground engaging structure rotate.
4. A machine according to claim 2 or claim 3 wherein the generally horizontal loading arm mounting axis is located above the rear wheels below, or at, or at least not substantially above, a plane containing an uppermost part of the bonnet structure.
5. A machine according to any one of the preceding claims wherein the loading arm includes a plurality of relatively telescopic sections and a load

handling tool support at an end of the loading arm furthest from the body, the support extending laterally with respect to the extent of the arm, in front of the bonnet structure.

6. A machine according to claim 5 wherein the load handling tool is a loading bucket or other suitable loading tool which is removable from the support to enable an alternative tool to be used.
7. A machine according to claim 5 or claim 6 wherein the loading tool in use, is located generally central in front of the central bonnet structure.
8. A machine according to any one of the preceding claims wherein the excavating arm is mounted at the rear end of the body on a carriage which permits the arm to be moved laterally across the rear of the body into an appropriate position for performing excavating operations.
9. A machine according to any one of the preceding claims in which the excavating arm is mounted on a mounting which permits the arm to rotate about a generally upright axis and about a generally horizontal axis during excavating operations.
10. A machine according to any one of the preceding claims wherein the loading arm is operated by first controls located at a first operating position in the operator's cab, and from which position the operator may drive the machine over the ground on the wheels, whilst the excavating arm is controlled by second controls at a second operating position in the operator's cab, an operator's seat being moveable to enable the operator to access and use either the first or second controls, depending upon the seat position.

11. An excavating and loading machine substantially as hereinbefore described with reference to and/or as shown in the accompanying drawings.


12. Any novel feature or novel combination of features described herein and/or as shown in the accompanying drawings.

ABSTRACT

Title: Excavating and Loading Machine

An excavating and loading machine (10) has a body (11) with a front end and a rear end, the body (11) being carried on a steerable wheeled ground engaging structure(15), the machine (10) including an excavating arm (25) mounted at the rear end of the body (11), and a loading arm (35) which is mounted on the body (11) and extends forwardly of the body (11), and wherein an operator's cab (12) is provided which is mounted towards the rear end of the body (11), generally centrally of the body (11) between sides of the machine (10), and a machine engine (23) is mounted beneath a bonnet structure (22) towards the front end of the body (11) generally centrally of the body (11) between sides of the machine (10), and the loading arm (35) is mounted towards one side of the machine (10) and at least over a range of operating positions extends alongside the cab (12) and bonnet structure (22).

13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000

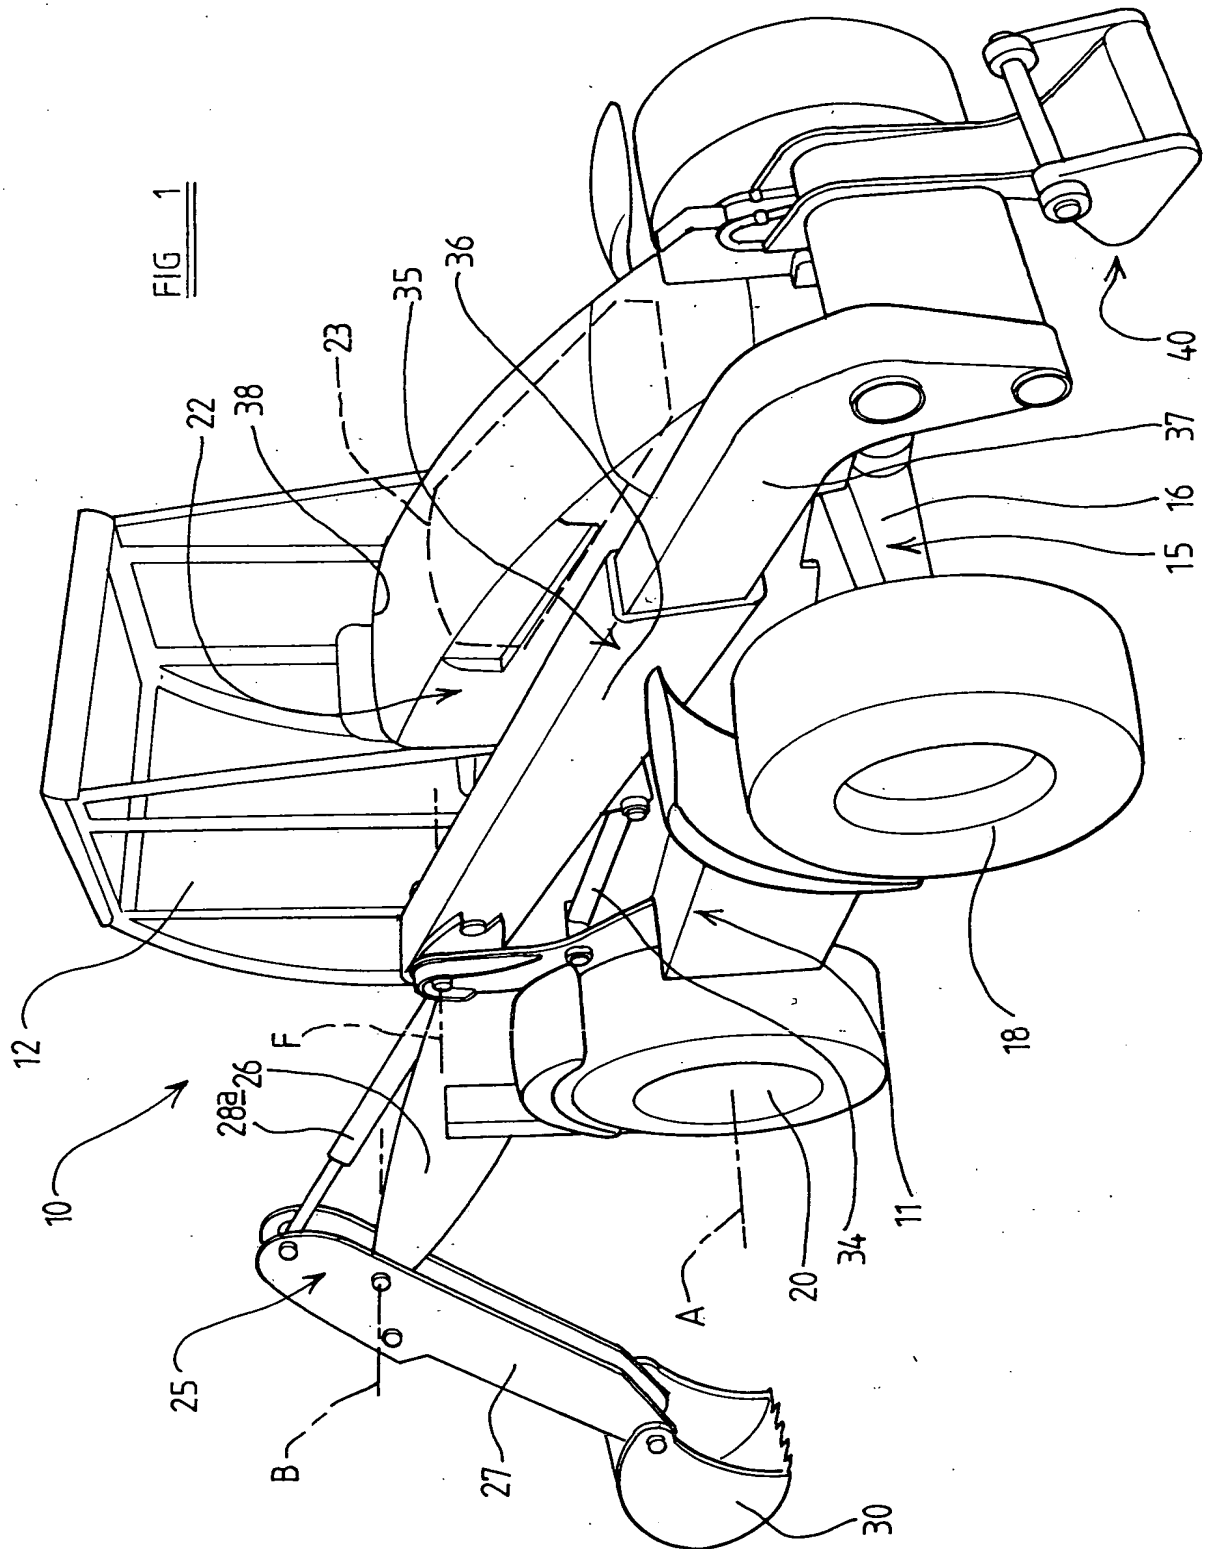





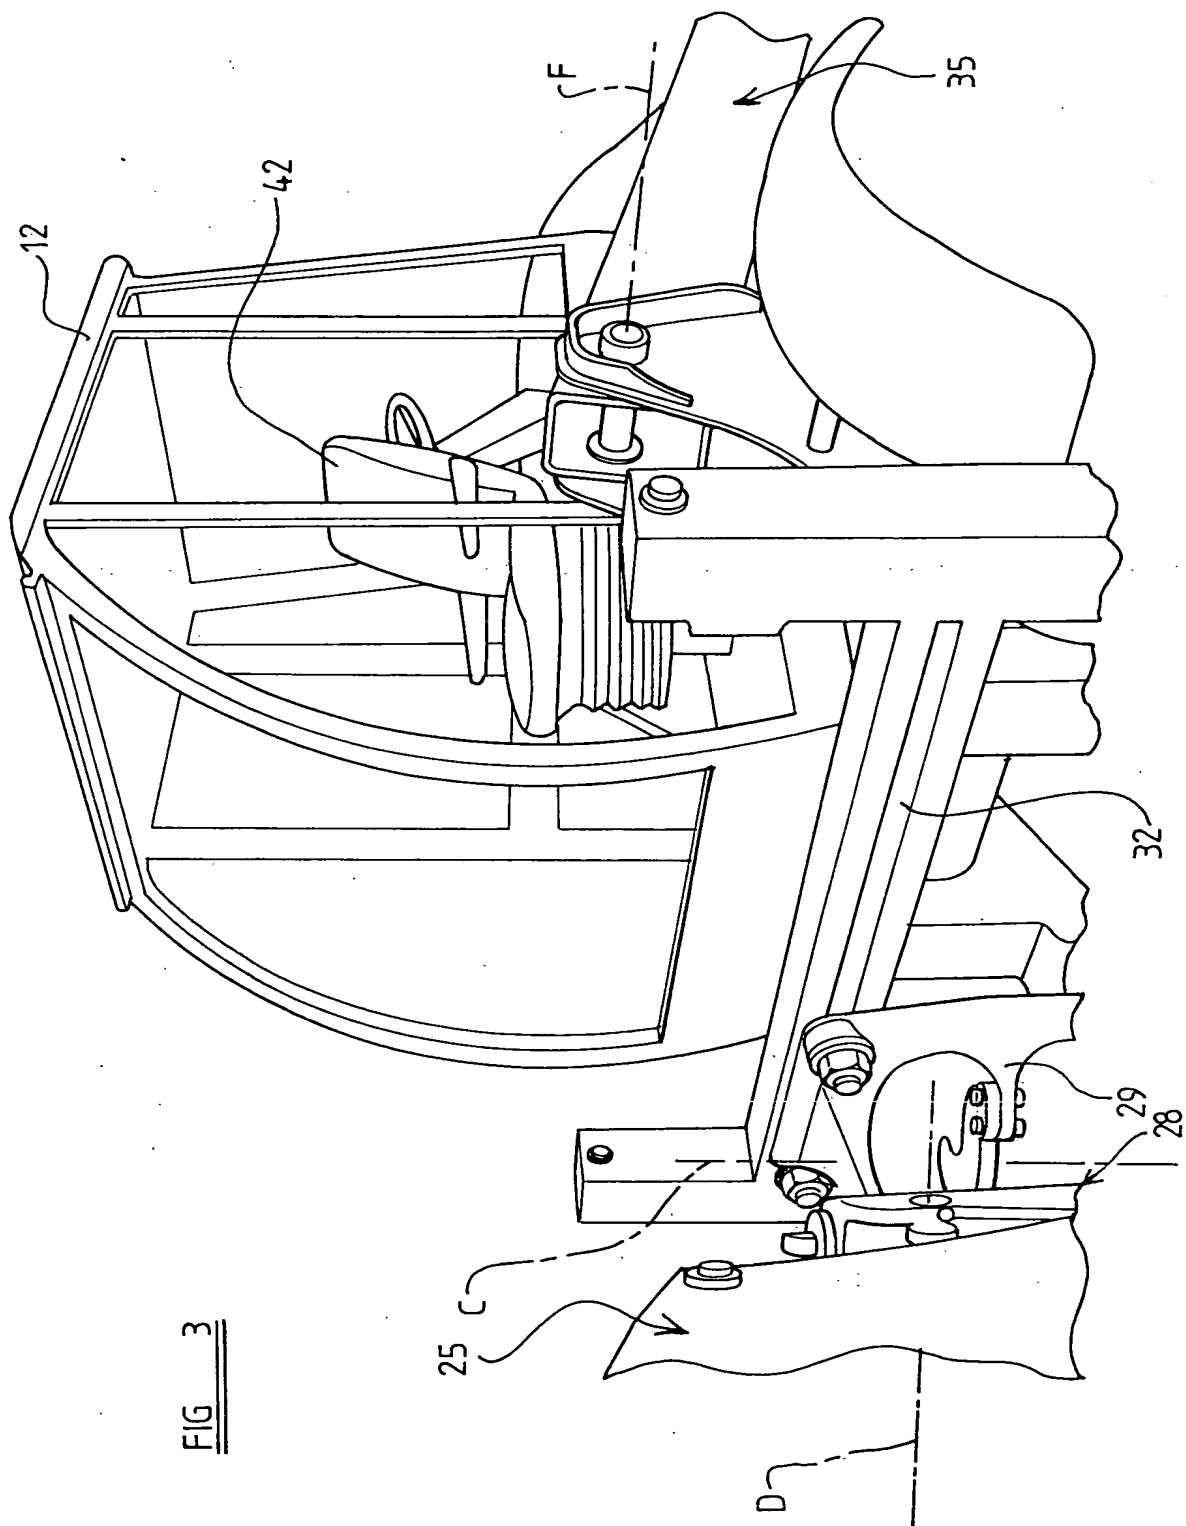


FIG 3